


LUXURY VINYL FLOORING

www.wanke.com

Creative
Options

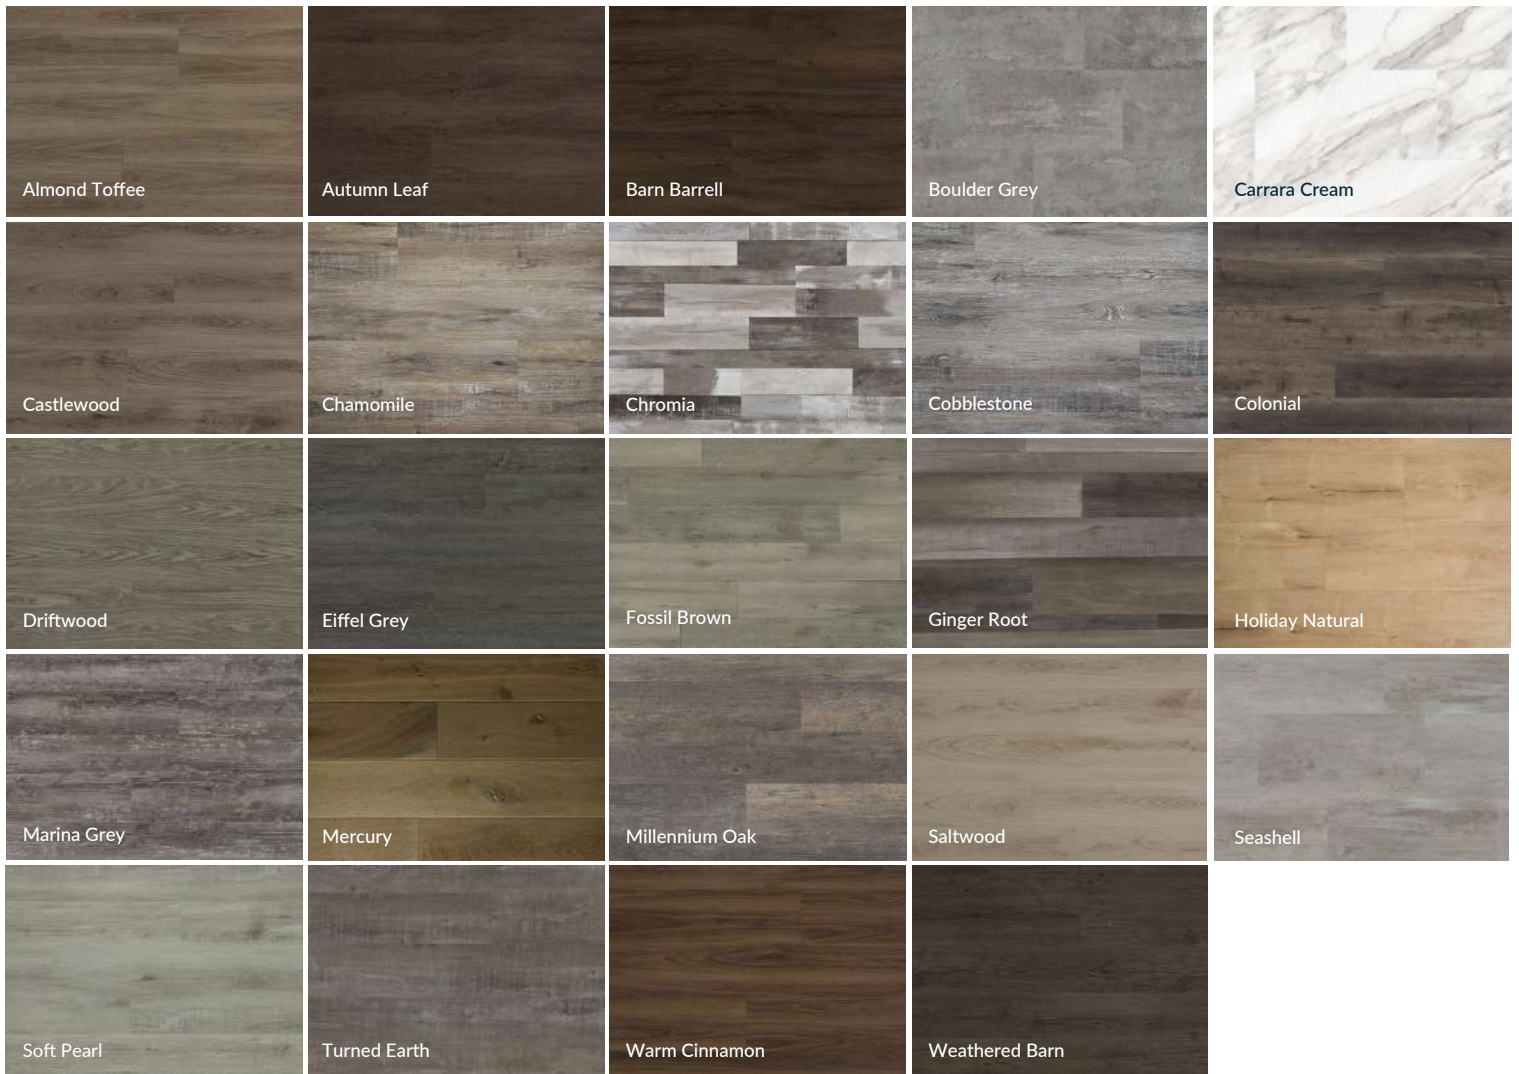

CREATIVE OPTIONS SPECIFICATIONS

Constructions	PVC
Thickness	5mm
Wear Layer	0.5mm 20 mil
Size	7" x 48", 9" x 48" & 12.36" x 24.6"
Finish	Polyurethane w/ anti bacterial nano silver, ultra matte
Edge Detail	Square edge
Sf Per Carton	7" 23.33, 9" 23.94, 12.36" 21.10
Sf Per Pallet	7" x 48" = 1,166.50 9" x 48" = 1,244.88 12" x 24" = 1,181.6
Installation	Loose Lay (glue down optional)
Classification	Best
Residential Warranty	Lifetime Limited Residential
Commerical Warranty	12 Year Limited Heavy Commercial
Recommended Adhesive	Dritac 5900

PERFORMANCE TESTING

Reaction To Fire	EN ISO 11925-2 Pass EN ISO 9239-1 Pass
Chemical Resistance	ASTM F925 Pass
Light Resistance	ASTM F1515 < 8
Wear Resistance	ASTM F510 Wear group P EN 434 ≤ 0.25%
Static Electrical Propensity	0.5kV
Residual Indentation	EN ISO 24343-1 Avg 0.02mm
Anti-Slip Property	DIN 51130 R10
Voc Emission	ISO 16000 A+
Phalates	EN 14372 N.D. CPSC-CH-C 1101 Pass
Castor Chair	ISO 4918 Pass

Creative
Options

